


ROAM Enabled Gateway - MX



AcuityBrands.
Technology Services

ORDERING INFORMATION:

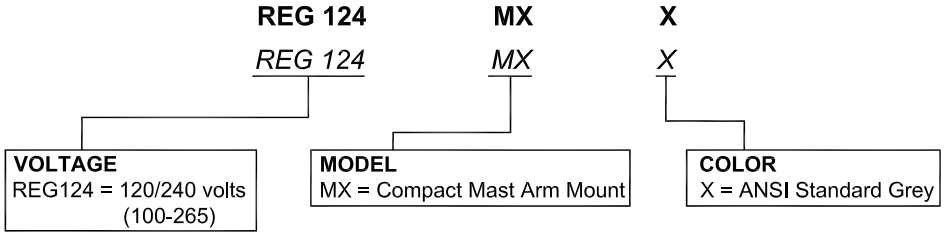

FEATURES:

Wireless Enabled backbone and data backhaul device

Wireless Enabled Communication

- 2.4 GHz - 802.15.4 compatible
- Cellular network uplink - GSM, GPRS, CDMA, modem
- Ethernet link for optional WAN connection via internet
- FCC part 15 approved
- 1000 foot clear line of site
- Supports up to 2,000 nodes

General

- 320J MOV - 6,500 amp surge protection
- Voltage 100-265 VAC
- -40 to +85°C ambient
- Mast arm mounting (2 inch)
- Powered through standard locking type receptacle on fixture
-3 foot cable and locking type plug included
- Average power consumption: 5.5 watts
- Maximum power consumption: 12 watts
- Maximum EPA is 1.62 sq. ft.
- The unit weight is 10 lbs.

THIS DRAWING, WHEN APPROVED, SHALL BECOME THE COMPLETE SPECIFICATION FOR THE MATERIAL TO BE FURNISHED BY ROAM ON THE ORDER NOTED ABOVE. A UNIT OF SIMILAR DESIGN MAY BE SUPPLIED, BUT ONLY AFTER APPROVAL BY THE CUSTOMER IN WRITING. ON POLE ORDERS AN ANCHOR BOLT TEMPLATE PRINT WILL BE SUPPLIED. THIS PRINT IS THE PROPERTY OF HOLOPHANE AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON EXPRESS CONDITION THAT IT WILL NOT BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO OUR INTERESTS, AND ONLY IN CONNECTION WITH MATERIAL FURNISHED BY ROAM.

ORDER #:	
TYPE:	
DRAWN:	BHH
DATE:	06-30-08
DWG #:	REG124MX